

# Bailers

## Geotech Geobailer Reusable Bailers

Geotech reusable bailers provide a simple and cost effective way to collect groundwater samples from monitoring wells. These ready to use bailers feature long lasting materials of construction and are easy to clean. Our PVC Geobailers are PFAS-free and our Stainless Steel Geobailers can be ordered PFAS-free as well.

### FEATURES

#### White PVC Geobailers


- An economical reusable bailers constructed of white PVC material
- PFAS-free
- Available with either a standard check ball, recessed check ball, or recessed double check balls

#### Clear PVC Geobailers

- Constructed with transparent PVC material
- Great for viewing hydrocarbon layers
- PFAS-free
- Available with either a standard check ball, recessed check ball, or recessed double check balls

#### Stainless Steel Geobailers

- Rugged 316 Stainless Steel material
- The most durable and long lasting Geobailer
- Available with Viton® or PFAS-free O-rings – specify at time of order

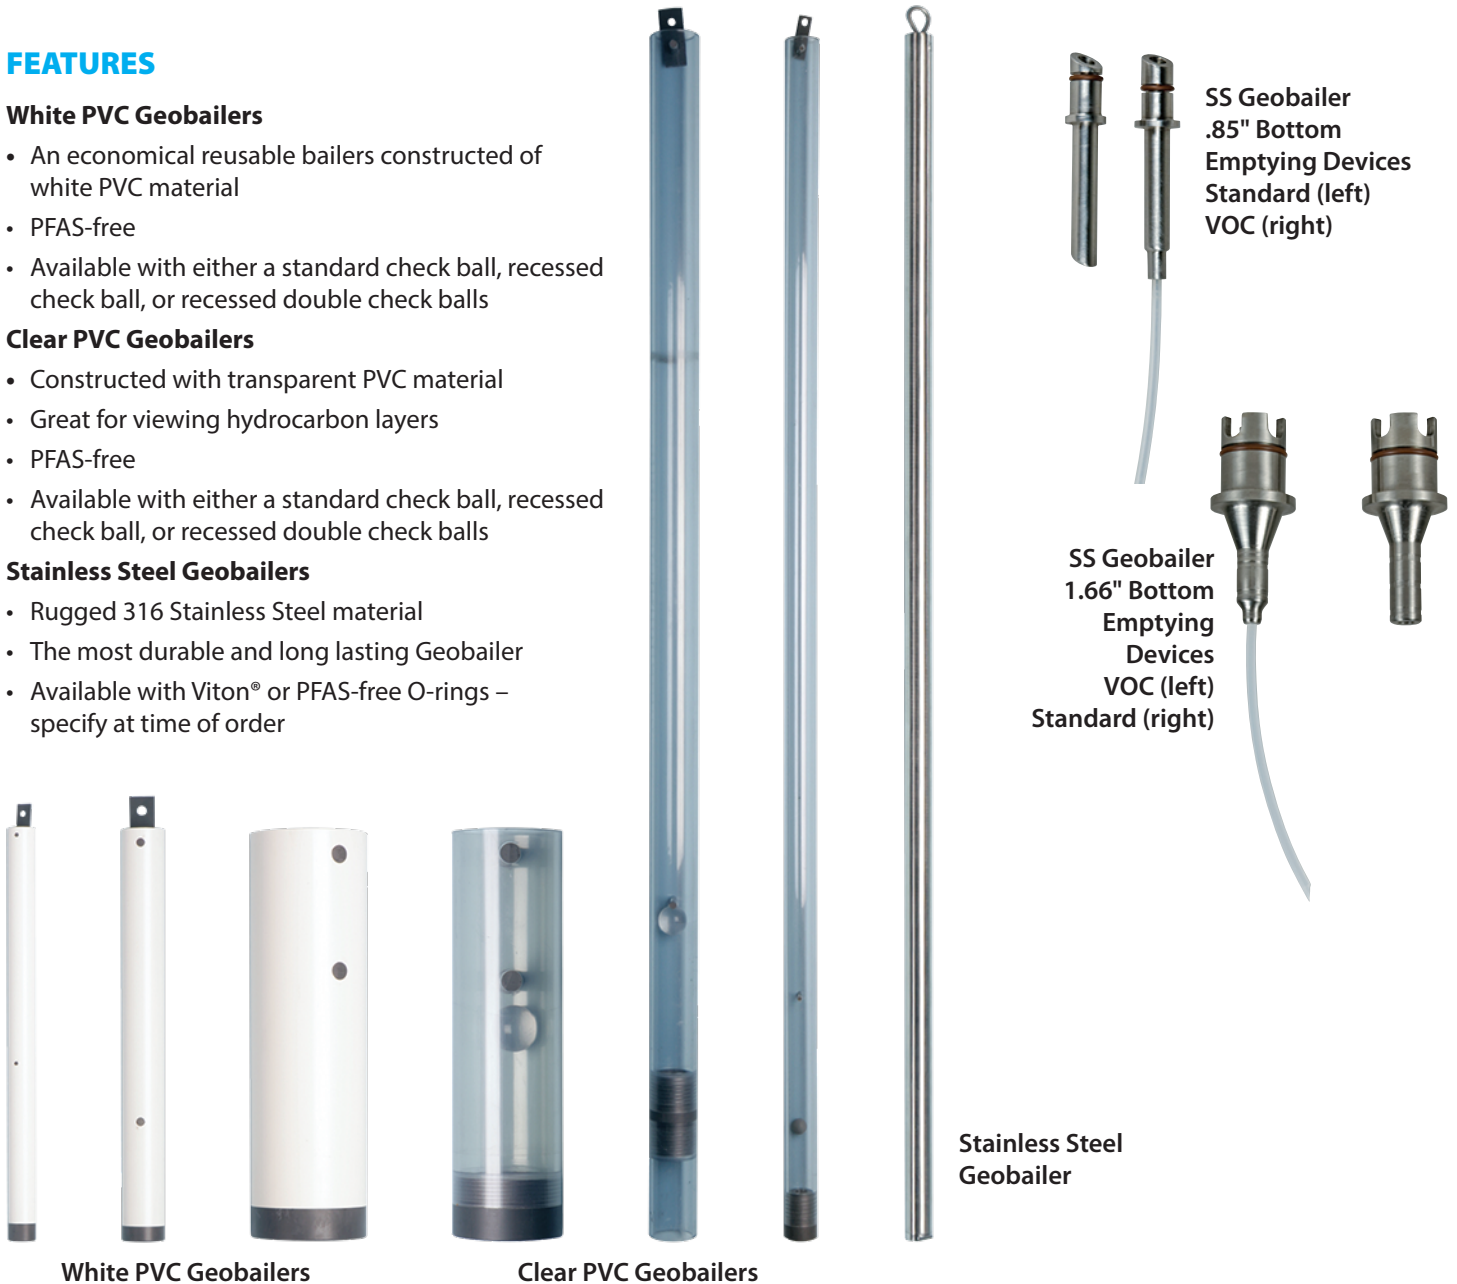

White PVC Geobailers

Clear PVC Geobailers

Stainless Steel Geobailer

**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**

2650 East 40th Avenue • Denver, Colorado 80205

(303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242

email: sales@geotechenv.com website: www.geotechenv.com

# Bailers

## Geotech Geobailer Reusable Bailers

### SPECIFICATIONS

#### PVC Geobailers

White, Clear, Recessed Check, Recessed Double Check

Nominal Length	Volume oz. (ml)				
	12" (30.5 cm)	24" (61 cm)	36" (91.4 cm)	48" (121.9 cm)	60" (152.4 cm)
<b>Diameter OD</b>					
0.675" (17.145 mm)	1.2 (34)	2.4 (72)	3.7 (109)	5.0 (147)	6.2 (185)
0.84" (21.336 mm)	1.9 (55)	3.9 (115)	5.9 (174)	7.9 (234)	9.9 (294)
1.66" (42.164 mm)	9.1 (270)	19.1 (564)	29.0 (858)	38.9 (1152)	48.9 (1446)
3.5" (88.90 mm)	45.1 (1333)	94.2 (2786)	143.3 (4240)	192.5 (5694)	241.6 (7148)


#### 316 Stainless Steel Geobailers

Nominal Length	Volume oz. (ml)
	36" (91.4 cm)
<b>Diameter OD</b>	
0.84" (21.336 mm)	7.8 (230)
1.66" (42.164 mm)	36.2 (1070)

Optional Geotech Electric Rewind Bailer Cable Reel



### BAILING CORD SPECIFICATIONS



Bailing Cord Materials	Sizes
Yellow Nylon .....	3/16", 1000 ft. roll
White Diamond Braid Nylon .....	1/8", 1000 ft. roll
White Nylon Twine #15 .....	350 ft. roll
FEP Coated Stainless Steel Safety Cable .....	1/16" x 3/32", 3/32" x 1/8"

**CALL GEOTECH TODAY (800) 833-7958**

**Geotech Environmental Equipment, Inc.**  
 2650 East 40th Avenue • Denver, Colorado 80205  
 (303) 320-4764 • **(800) 833-7958** • FAX (303) 322-7242  
 email: sales@geotechenv.com website: www.geotechenv.com